


**Ultraviolet light stabilizer for coating, film, and tape.**
**LIGHT STABILIZER**
**1. General**


UV-119 belongs to the family of high formula weight sterically hindered amine light stabilizers with good migration resistance and low volatility. It is very effective as antioxidant and provides significant long-term heat stability of polyolefins and elastomers.

**2. Properties**

Structure :

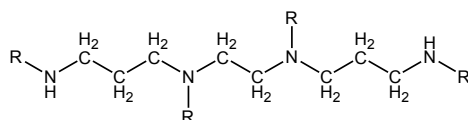

Where R=

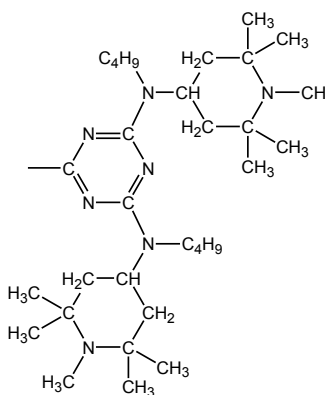

Chemical name	:	N,N',N'',N'''-tetrakis(4,6-bis(butyl-(N-methyl-2,2,6,6-tetramethylpiperidin-4-yl)amino)triazin-2-yl)-4,7-diazadecane-1,10-diamine
CAS No.	:	106990-43-6
Molecular weight	:	>2,200

**3. Physical Data**

Appearance	:	Light yellow crystalline powder
Odor	:	Faint
Melting range	:	115 - 150 °C
Specific gravity	:	1.03 @20 °C
Vapor pressure	:	4.7 x 10 <sup>-11</sup> Pa @20 °C
Bulk density	:	0.55 g/cm <sup>3</sup> @20 °C

Ultraviolet light stabilizer for coating, film, and tape.

LIGHT STABILIZER

**4. Solubility**

(g in 100 ml solvent)

Acetone	:	6
Ethyl acetate	:	>20
Hexane	:	>20
Water	:	<0.1

**5. Specification**

Appearance	:	Light yellow crystalline powder
Melting range	:	115 –150 °C
UV Transmittance	:	92% min. @450 nm.
Volatiles	:	0.5% max.
Ash	:	0.1% max.

**8. Packaging**

20 kg/Carton box